









## 2.5" SSD

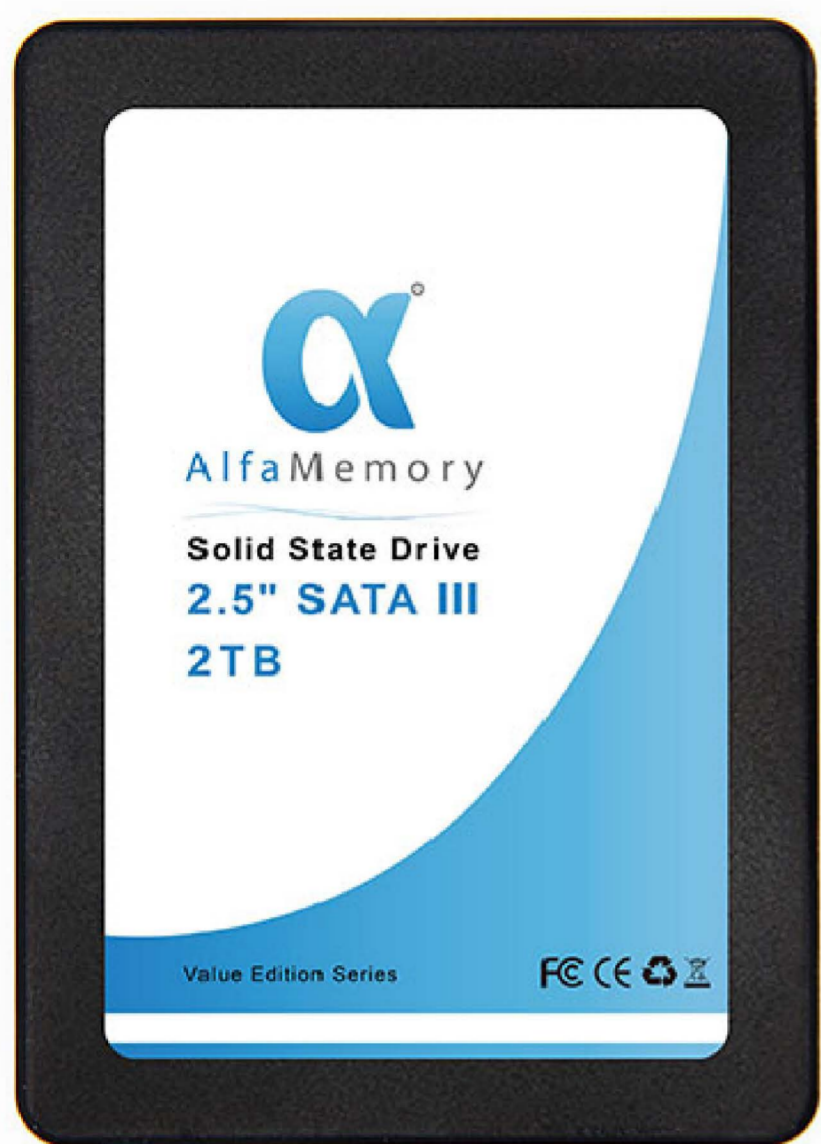

69.85 mm

100 mm

### Application

-  Desktop
-  Notebook
-  Casino Gaming
-  Enterprise Computing
-  Medical Industry
-  Military and Aerospace
-  Embedded/Industrial Systems

### Read Speed

Up to 560 MB/s

### Write Speed

Up to 520 MB/s

### Capacities

60GB-2TB

PCBA Size	54×43.2×5.7 mm
Housing Size	100×69.85×7 mm
Read / Write Speed	Up to 560 / 520 MB/s
Capacity	60GB / 64GB / 120GB / 128GB / 240GB / 256GB / 480GB / 512GB / 960GB / 1TB / 2TB
Flash Type	TLC / QLC
Working Voltage	DC 5V ±10%
Working Temperature	Commercial Grade: 0 to +70 °C
Storage Temperature	-40 to 85 °C
MTBF	>1,000,000 hours
Form Factor	2.5"(HDD compatible)
Interface	Supports 1-port 1.5/3.0/6.0Gbps SATA I/II/III interface.
Compatibility	Full SATA hard disk compatible

